





Jedno polje			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR153 (kg/m ²)								
Raspon (L)			4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	10,15	M max	584,04	459,63	370,64	304,79	254,71	215,74	184,81	159,86	139,44
		L/150	601,32	419,43	303,12	225,32	171,32	132,67	104,28	82,97	66,65
		L/200	448,56	312,14	224,91	166,56	126,06	97,07	75,78	59,79	47,55
		L/300	295,79	204,85	146,70	107,79	80,79	61,47	47,28	36,61	28,46
		L/400	219,41	151,20	107,59	78,41	58,16	43,67	33,03	25,03	18,91
		L/500	119,01	119,01	57,66	60,78	44,58	32,99	24,47	18,08	13,18
0,88	11,90	M max	749,41	589,96	475,92	391,54	327,36	277,41	237,78	205,81	179,64
		L/150	705,55	492,13	355,67	264,37	201,02	155,66	122,36	97,34	78,20
		L/200	526,31	366,25	263,89	195,43	147,91	113,90	88,92	70,16	55,79
		L/300	347,07	240,35	172,13	126,48	94,80	72,12	55,47	42,96	33,39
		L/400	257,45	177,41	126,23	92,00	68,25	51,23	38,75	29,37	22,19
		L/500	203,67	139,65	98,71	71,32	52,31	38,71	28,71	21,21	15,46
1,00	13,52	M max	847,60	667,26	538,26	442,81	370,22	313,73	268,90	232,74	203,14
		L/150	801,76	559,24	404,17	300,43	228,43	176,89	139,04	110,62	88,87
		L/200	598,07	416,19	299,88	222,08	168,08	129,43	101,04	79,72	63,41
		L/300	394,39	273,14	195,60	143,73	107,72	81,96	63,03	48,82	37,95
		L/400	292,55	201,61	143,45	104,55	77,55	58,22	44,03	33,37	25,22
		L/500	231,45	158,69	112,17	81,05	59,45	43,98	32,62	24,10	17,57
1,25	16,93	M max	1172,99	923,75	745,46	613,55	513,22	435,14	373,18	323,20	282,30
		L/150	1002,20	699,05	505,21	375,54	285,53	221,12	173,80	138,28	111,08
		L/200	747,59	520,23	374,85	277,59	210,09	161,78	126,30	99,66	79,25
		L/300	492,99	341,41	244,49	179,65	134,65	102,45	78,79	61,02	47,43
		L/400	365,69	252,01	179,32	130,69	96,93	72,78	55,04	41,72	31,52
		L/500	289,31	198,36	140,21	101,30	74,30	54,98	40,79	29,86	21,97



Materijal: S320GD
Debljina: 0,75-1,25mm
L_{max}: 15.500mm




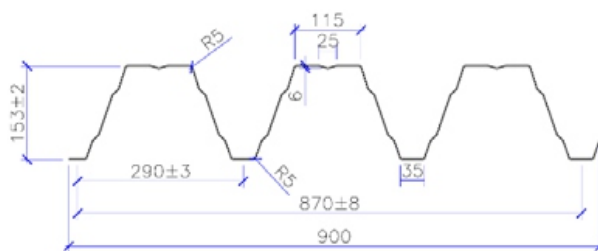


Dva polja			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR153 (kg/m ²)								
Raspon (L)			4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	10,15	M max	429,98	337,89	272,04	223,30	186,24	157,39	134,51	116,04	100,92
		L/150	1463,68	1025,09	744,65	557,05	426,83	333,64	265,19	213,79	174,44
		L/200	1095,33	766,39	556,06	415,35	317,70	247,79	196,46	157,91	128,40
		L/300	726,97	507,68	367,46	273,66	208,55	161,95	127,72	102,03	82,36
		L/400	542,79	378,33	273,17	202,81	153,98	119,03	93,36	74,09	59,33
		L/500	432,29	300,71	216,58	160,30	121,24	93,28	72,75	57,32	45,52
0,88	11,90	M max	504,51	396,47	319,19	262,00	218,52	184,67	157,82	136,15	118,42
		L/150	1717,38	1202,77	873,73	65,60	500,82	391,47	311,16	250,85	204,68
		L/200	1285,18	899,23	652,44	487,34	372,76	290,75	230,52	185,28	150,66
		L/300	852,98	595,67	431,15	321,10	244,70	190,02	149,87	119,72	96,63
		L/400	636,88	443,90	320,51	237,96	180,67	139,66	109,54	86,93	69,62
		L/500	507,22	352,84	254,12	188,09	142,25	109,45	85,35	67,26	53,41
1,00	13,52	M max	573,31	450,54	362,71	297,73	248,31	209,86	179,34	154,71	134,56
		L/150	1951,57	1366,79	992,88	742,73	569,12	444,85	353,58	285,05	232,59
		L/200	1460,44	1021,85	741,41	553,81	423,59	330,40	261,94	210,54	171,20
		L/300	969,30	676,91	489,95	364,87	278,07	215,93	170,30	136,03	109,81
		L/400	723,73	504,53	364,22	270,41	205,31	158,71	124,48	98,78	79,12
		L/500	576,39	400,96	288,78	213,74	161,65	124,37	96,99	76,43	60,69
1,25	16,93	M max	716,63	563,17	453,39	372,16	310,40	262,32	224,18	193,39	168,21
		L/150	2439,47	1708,48	1241,09	928,41	711,39	556,06	441,98	356,32	290,74
		L/200	1825,54	1277,31	926,77	692,25	529,48	412,99	327,43	263,18	214,00
		L/300	1211,62	846,13	612,43	456,10	347,59	269,92	212,88	170,05	137,26
		L/400	904,66	630,54	455,27	338,02	256,63	198,38	155,60	123,48	98,89
		L/500	720,49	501,19	360,97	267,17	202,07	155,47	121,24	95,54	75,86



Materijal: S320GD
Debljina: 0,75-1,25mm
L_{max}: 15.500mm



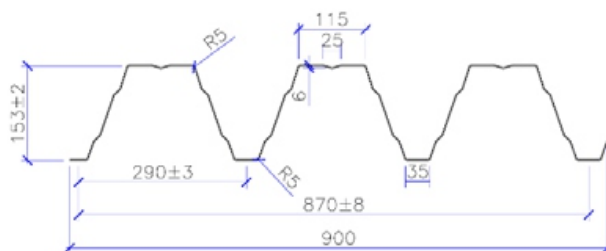

Tri polja			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR153 (kg/m ²)								
Raspon (L)			4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	10,15	M max	539,67	424,57	342,24	281,32	234,98	198,93	170,31	147,24	128,35
		L/150	1160,33	812,04	589,34	440,36	336,95	262,94	208,58	167,77	136,52
		L/200	867,81	606,60	439,57	327,84	250,28	194,78	154,01	123,39	99,96
		L/300	575,30	401,15	289,81	215,32	163,61	126,61	99,43	79,02	63,40
		L/400	429,11	298,43	214,92	159,05	120,28	92,52	72,14	56,83	45,11
		L/500	341,29	236,80	169,99	125,29	94,28	72,07	55,76	43,52	34,14
0,88	11,90	M max	633,21	498,15	401,56	330,07	275,71	233,41	199,84	172,75	150,60
		L/150	1361,46	952,80	691,49	516,69	395,36	308,52	244,75	196,85	160,19
		L/200	1018,24	711,74	515,76	384,66	293,67	228,54	180,70	144,79	117,29
		L/300	675,01	470,68	340,04	252,63	191,97	148,55	116,66	92,72	74,38
		L/400	503,41	350,16	252,17	186,62	141,12	108,55	84,64	66,68	52,93
		L/500	400,44	277,84	199,45	147,01	110,61	84,56	65,42	51,06	40,06
1,00	13,52	M max	719,56	566,09	456,31	375,09	313,32	265,24	227,09	196,31	171,13
		L/150	1547,11	1082,72	785,78	587,15	449,27	350,60	278,11	223,69	182,04
		L/200	1157,09	808,79	586,10	437,12	333,71	259,70	205,34	164,52	133,28
		L/300	767,07	534,87	386,40	287,08	218,15	168,81	132,57	105,36	84,53
		L/400	572,06	397,91	286,56	212,07	160,37	123,36	96,19	75,77	60,15
		L/500	455,04	315,74	226,65	167,06	125,69	96,09	74,35	58,03	45,52
1,25	16,93	M max	899,44	707,61	570,39	468,86	391,64	331,54	283,87	245,39	213,91
		L/150	1933,88	1353,40	982,23	733,93	561,59	438,24	347,65	279,61	227,55
		L/200	1446,35	1011,00	732,62	546,39	417,14	324,63	256,68	205,65	166,60
		L/300	958,83	668,59	483,00	358,86	272,69	211,01	165,71	131,70	105,66
		L/400	715,07	497,39	358,20	265,09	200,46	154,20	120,23	94,62	75,19
		L/500	568,81	394,67	283,32	208,83	157,12	120,12	92,94	72,53	56,91



Materijal: S320GD
Debljina: 0,75-1,25mm
L_{max}: 15.500mm

