


VISOKOPROFILISANI TRAPEZNI LIM

TR 85/300/900

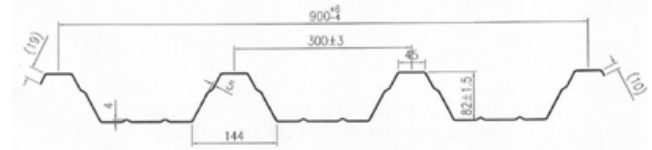

www.montinggroup.com

Jedno polje			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR85 (kg/m ²)								
Raspon (L)			2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	8,33	M max	1089,69	694,94	480,50	351,20	267,28	209,75	168,60	138,15	114,99
		L/150	1289,73	656,62	376,78	234,46	154,56	106,28	75,42	54,77	40,44
		L/200	965,39	490,56	280,68	173,94	114,01	77,81	54,66	39,17	28,43
		L/300	641,06	324,51	184,59	113,42	73,47	49,34	33,90	23,58	16,41
		L/400	478,89	241,48	136,54	83,16	53,20	35,10	23,52	15,78	10,41
		L/500	381,59	191,66	107,71	65,01	41,04	26,56	17,30	11,10	6,80
0,88	9,58	M max	1376,52	878,09	607,33	444,07	338,11	265,47	213,50	175,06	145,81
		L/150	1506,72	767,09	440,16	273,88	180,54	124,14	88,08	63,96	47,22
		L/200	1127,81	573,09	327,89	203,18	133,17	90,88	63,83	45,74	33,18
		L/300	748,90	379,09	215,62	132,48	85,81	57,61	39,58	27,52	19,15
		L/400	559,45	282,09	159,49	97,13	62,13	40,98	27,46	18,41	12,13
		L/500	445,77	223,89	125,81	75,92	47,92	31,00	20,18	12,95	7,92
1,00	10,89	M max	1652,82	1054,53	729,53	533,56	406,38	319,18	256,80	210,65	175,55
		L/150	1705,33	868,19	498,16	309,97	204,31	140,48	99,67	72,37	53,42
		L/200	1276,47	648,61	371,09	229,94	150,71	102,83	72,22	51,75	37,53
		L/300	847,60	429,04	244,02	149,92	97,10	65,18	44,78	31,12	21,65
		L/400	633,17	319,25	180,49	109,91	70,29	46,36	31,05	20,81	13,71
		L/500	504,52	253,37	142,37	85,91	54,21	35,06	22,82	14,63	8,94
1,25	13,61	M max	2106,56	1344,11	929,94	680,21	518,13	407,00	327,52	268,71	223,98
		L/150	2032,72	1034,84	593,76	369,43	243,49	167,41	118,76	86,21	63,62
		L/200	1521,51	773,10	442,29	274,04	179,59	122,53	86,04	61,63	44,69
		L/300	1010,30	511,36	290,83	178,66	115,69	77,65	53,32	37,05	25,76
		L/400	754,70	380,49	215,09	130,97	83,74	55,21	36,96	24,76	16,29
		L/500	601,34	301,97	169,65	102,35	64,57	41,74	27,15	17,39	10,61




Materijal: S320GD
 Debljina: 0,75-1,25mm
 L_{max}: 15.500mm



VISOKOPROFILISANI TRAPEZNI LIM

TR 85/300/900

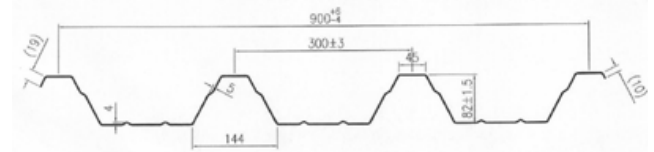


www.montinggroup.com

Dva polja			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR85 (kg/m ²)								
Raspon (L)			2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	8,33	M max	646,80	411,49	283,66	206,59	156,56	122,27	97,73	79,58	65,78
		L/150	3.120,61	1.594,04	919,27	576,08	383,42	267,02	192,59	142,81	108,25
		L/200	2.338,55	1.193,62	687,55	430,16	285,66	198,36	142,54	105,20	79,28
		L/300	1.556,50	793,21	455,83	284,23	187,90	129,70	92,49	67,60	50,32
		L/400	1.165,47	593,01	339,97	211,27	139,02	95,37	67,47	48,79	35,84
		L/500	930,85	472,88	270,45	167,50	109,70	74,78	52,45	37,51	27,15
0,88	9,58	M max	806,22	513,09	353,86	257,85	195,54	152,81	122,25	99,64	82,45
		L/150	3.645,69	1.862,24	1.073,93	672,99	447,91	311,93	224,98	166,81	126,44
		L/200	2.732,04	1.394,45	803,22	502,52	333,70	231,72	166,50	122,88	92,60
		L/300	1.818,39	926,66	532,51	332,04	219,50	151,50	108,03	78,95	58,76
		L/400	1.361,56	692,77	397,15	246,80	162,39	111,40	78,79	56,98	41,84
		L/500	1.087,47	552,43	315,94	195,66	128,13	87,34	61,25	43,80	31,69
1,00	10,89	M max	965,31	614,52	423,97	309,07	234,50	183,37	146,80	119,74	99,16
		L/150	4.126,27	2.107,72	1.215,48	761,69	506,93	353,02	254,61	188,78	143,08
		L/200	3.092,18	1.578,26	909,08	568,74	377,67	262,24	188,43	139,05	104,78
		L/300	2.058,08	1.048,80	602,68	375,78	248,41	171,45	122,25	89,33	66,48
		L/400	1.541,03	784,07	449,48	279,31	183,78	126,06	89,16	64,47	47,33
		L/500	1.230,80	625,23	357,56	221,42	145,00	98,82	69,30	49,55	35,84
1,25	13,61	M max	1.332,89	848,96	586,09	427,59	324,71	254,18	203,73	166,40	138,01
		L/150	5.114,87	2.612,66	1.506,64	944,12	628,33	437,54	315,55	233,94	177,30
		L/200	3.833,00	1.956,34	1.126,83	704,94	468,09	325,00	233,51	172,30	129,82
		L/300	2.551,13	1.300,02	747,02	465,76	307,86	212,47	151,47	110,67	82,34
		L/400	1.910,19	971,87	557,11	346,17	227,74	156,20	110,45	79,85	58,61
		L/500	1.525,63	774,97	443,17	274,41	179,67	122,44	85,84	61,36	44,36



Materijal: S320GD
 Debljina: 0,75-1,25mm
 L_{max}: 15.500mm



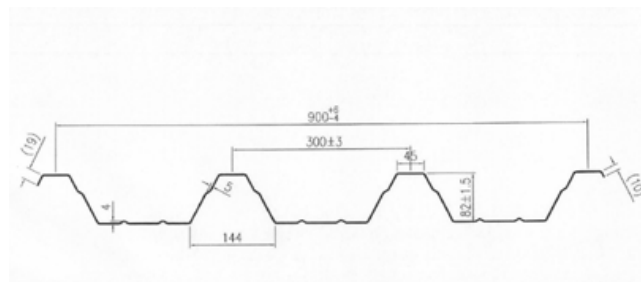

Tri polja			NOSIVOST PLAFONSKOG (POZITIVNI POLOZAJ) TR85 (kg/m ²)								
Raspon (L)			2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00
t (mm)	g(kg/m ²)	Ugib	Širina oslonca 90mm								
0,75	8,33	M max	810,22	516,07	356,29	259,95	197,42	154,55	123,88	101,19	83,93
		L/150	2.476,56	1.264,29	728,44	455,91	302,91	210,48	151,38	111,84	84,39
		L/200	1.855,52	946,31	544,43	340,03	225,28	155,96	111,63	81,98	61,39
		L/300	1.234,48	628,34	360,41	224,15	147,65	101,43	71,88	52,11	38,39
		L/400	923,95	469,35	268,41	166,21	108,83	74,17	52,01	37,18	26,89
		L/500	737,64	373,96	213,20	131,44	85,54	57,82	40,08	28,22	19,99
0,88	9,58	M max	1.009,78	643,37	444,33	324,32	246,43	193,02	154,82	126,56	105,06
		L/150	2.893,27	1.477,00	850,99	532,60	353,86	245,87	176,82	130,63	98,57
		L/200	2.167,73	1.105,52	636,01	397,22	263,16	182,17	130,39	95,75	71,70
		L/300	1.442,18	734,04	421,04	261,84	172,47	118,48	83,95	60,86	44,83
		L/400	1.079,40	548,30	313,55	194,15	127,12	86,63	60,74	43,41	31,39
		L/500	861,74	436,86	249,06	153,54	99,92	67,52	46,81	32,95	23,33
1,00	10,89	M max	1.208,92	770,43	532,24	388,62	295,40	231,49	185,78	151,95	126,23
		L/150	3.274,66	1.671,69	963,15	602,79	400,48	278,26	200,11	147,83	111,54
		L/200	2.453,47	1.251,24	719,83	449,56	297,83	206,16	147,55	108,34	81,13
		L/300	1.632,27	830,79	476,52	296,33	195,18	134,07	95,00	68,86	50,71
		L/400	1.221,68	620,56	354,86	219,72	143,86	98,02	68,72	49,11	35,50
		L/500	975,32	494,42	281,86	173,75	113,06	76,39	52,95	37,27	26,38
1,25	13,61	M max	1.668,95	1.064,04	735,45	537,32	408,73	320,56	257,50	210,84	175,35
		L/150	4.059,21	2.072,16	1.193,86	747,15	496,37	344,86	247,99	183,18	138,20
		L/200	3.041,25	1.550,97	892,24	557,21	369,12	255,49	182,84	134,23	100,50
		L/300	2.023,30	1.029,78	590,62	367,27	241,88	166,13	117,69	85,29	62,80
		L/400	1.514,32	769,18	439,82	272,30	178,26	121,44	85,11	60,81	43,94
		L/500	1.208,94	612,82	349,33	215,32	140,08	94,63	65,57	46,13	32,63



Materijal: S320GD
Debljina: 0,75-1,25mm
Lmax: 15.500mm

